



# **Dynatex**®



## **Product Catalog**

- Industrial**
- Heavy Duty**
- Fasteners**
- Agriculture**
- Marine**
- Automotive**

# Table of Contents

## Gasket Makers

Dyna Series	.03
Super Stuff	.04
RTV's	.05

## RTV Silicones

Silicone Sealants	.06
Industrial, Marine Grade	.07

## Repair Adhesives

Trailer Sealant	.06
Hi-Tack Gasket Spray	.08
Auto Seam Sealant	.08
Rear View Mirror Adhesive	.08
Quick Weld Compound	.08
4 Minute Epoxy	.09
Gas Tank Repair	.09
Muffler & Tailpipe Sealant	.09
Brush - On Electrical Tape	.09
Super Glue	.10
Weatherstrip Adhesive	.10

## Anaerobic Boltlockers

Anaerobic Gasket Maker	.11
Pipe Sealant	.11
Thread Sealant	.11
Boltlocker Primer	.12
Boltlockers	.12
Sleevelockers	.13

## High Performance Lubricants

Anti-Seize	.14
Brake System Silicone Compound	.15
Brake & Caliper Lubricant	.15
Synthetic Brake & Caliper Lubricant	.15
Disc Brake Quiet	.15
Heat Transfer Compound	.16
Red Grease	.16
White Lithium Grease	.16
Dielectric Grease	.17
Motor Assembly Grease	.17
Wheel Bearing Grease	.17
Transmission Assembly Lube	.17

## Cleaners

Brake & Parts Cleaner	.18
Gasket Remover	.18
Battery Terminal Cleaner	.18
Battery Terminal Protector	.18
Carb & Choke Cleaner	.19
Silicone Spray Lubricant	.19
Penetrating Oil	.19
Electrical Parts Cleaner	.20
Contact Cleaner	.20
Engine Degreaser	.20
Undercoating	.20
Glass Cleaner	.21
Belt Dressing	.21
Hand Cleaner	.21
Brake Fluid	.21

Interchange	.22-23
-------------	--------

## Technology at Work



Dynatex® is a major manufacturer and packager of automotive, heavy duty, fastening, industrial, and marine chemicals. Through our state of the art production processes, Dynatex® has the capability of meeting our customers' specialized needs; No matter what color, size or shape, Dynatex® has the ability to deliver. Dynatex® offers 48 hour turnaround on all incoming orders along with the best quality products available that conform to ISO 9002 standards.

Please review this catalog. If you don't see what you are looking for, give us a call. Chances are we have the ability to manufacture the product and package to your specific requirements.

Dynatex®...Products and Technology for today and beyond.

**Silicone**  
**Anaerobic Threadlockers**  
**Anti-Seize Lubricants**  
**Adhesives**  
**Sealants**  
**Solvents**





## DynaCopper

RTV Silicone Gasket Maker / O<sub>2</sub> Sensor Safe

Advanced formula instant gasketing material designed for late model vehicles with elevated operating temperatures. Low odor, sensor safe; non-corrosive and manufactured to exceed OEM specifications. Highly flexible and will not leak. Temperature resistant up to 700°F (371°C). Use on valve covers, transmission pans, exhaust manifolds/head-ers, oil pans, thermostat housings and water pumps.

### Ordering Information:

Part No.: 47101  
Size: 3.8 oz. (108g)  
Packaging: Tube Carded  
Units Per Case: 12

## DynaGrey

RTV Silicone Gasket Maker / O<sub>2</sub> Sensor Safe

Formulated for import cars. Use to replace most gaskets. High temperature, sensor safe, low-odor and non-corro-sive. Resists water, oil and anti-freeze. Will not leak. Temperature resistant up to 625°F (329°C). Use on valve covers, oil pans, water pumps, transmission pans, thermo-stat housings, timing covers and intake manifold end seals.

### Ordering Information:

Part No.: 47181  
Size: 3.8 oz. (108g)  
Packaging: Tube Carded  
Units Per Case: 12

## DynaBlack

RTV Silicone Gasket Maker / O<sub>2</sub> Sensor Safe

Excellent oil resistance, guaranteed not to leak. Leak proof in the presence of oil, water and anti-freeze. Sensor safe and manufactured to meet OEM specifications. Makes instant gaskets for all engines. Temperature resistant up to 625°F (329°C). Use on valve covers, oil pans, transmis-sion pans, timing covers, and intake manifold end seals.

### Ordering Information:

Part No.: 47200  
Size: 3.8 oz. (108g)  
Packaging: Tube Carded  
Units Per Case: 12

## DynaBlue

RTV Silicone Gasket Maker / O<sub>2</sub> Sensor Safe

Sensor safe, low odor, non-corrosive sealant manufactured to meet OEM specifications. Will not leak and remains flex-ible. Resists oil, water, anti-freeze, grease and transmis-sion fluid. Temperature resistant up to 500°F (260°C). Use to replace gaskets on valve covers, oil pans, transmission pans, rear-end housings, water pumps and timing chain covers.

### Ordering Information:

Part No.: 47203  
Size: 3.8 oz. (108g)  
Packaging: Tube Carded  
Units Per Case: 12





## Super Stuff

Fast Cure Gasket Maker / O<sub>2</sub> Sensor Safe

Dynatex® Super Stuff is a state-of-the-art “fast curing” elastomeric rubber being used by many automotive technicians to replace cut gaskets. Super Stuff is manufactured to meet OEM specs, sensor safe, non-corrosive, oil resistant, and will not leak. It is designed to provide increased oil, water, anti-freeze, and transmission fluid resistance. Product is temperature resilient up to 625°F (329°C). Protects against aging, weathering, and thermal cycling without hardening, shrinking, or cracking. Guards against leaks caused by vibration and thermal expansion. Use on: valve covers, transmission pans, oil pump flanges, timing gear and differential covers, water pumps, and intake end seals.

### Ordering Information:

**Part No.: 47270**  
 Size: 9 Net oz.  
 Packaging: Automatic Can  
 Units Per Case: 12

**Part No.: 47290**  
 Size: 10.1 Fl. oz.  
 Packaging: Cartridge  
 Units Per Case: 12



## Black RTV Silicone Gasket Maker

O<sub>2</sub> Sensor Safe

Formulated for gasket making applications. Sensor safe and manufactured to meet OEM specifications. Makes instant, leak proof gaskets for all engines, drive train equipment and related components. Temperature resistant up to 500°F (260°C). Resists oil, water anti-freeze and transmission fluid. Cures tough and flexible. Works on all vehicles.

### Ordering Information:

**Part No.: 49200**  
 Size: 3 oz. (85g)  
 Packaging: Tube Carded  
 Units Per Case: 12

**Part No.: 49271**  
 Size: 7.25 oz. (227g)  
 Packaging: Automatic Can  
 Units Per Case: 12

**Part No.: 49290**  
 Size: 11 oz. (312g)  
 Packaging: Cartridge  
 Units Per Case: 12



## Red RTV Silicone Gasket Maker

Hi-Temp / O<sub>2</sub> Sensor Safe

Formulated to withstand higher operating temperatures. Sensor safe and manufactured to meet OEM specifications. Resists cracking and migration caused by thermal cycling. Will not leak. Temperature resistant up to 650°F (343°C). Resists oil, water, anti-freeze and transmission fluid.

### Ordering Information:

- Part No.: 49202**  
Size: 3 oz. (85g)  
Packaging: Tube Carded  
Units Per Case: 12
- Part No.: 49272**  
Size: 7.25 oz. (227g)  
Packaging: Automatic Can  
Units Per Case: 12
- Part No.: 49292**  
Size: 11 oz. (312g)  
Packaging: Cartridge  
Units Per Case: 12



## Blue RTV Silicone Gasket Maker

O<sub>2</sub> Sensor Safe

Replaces most cut gaskets. Sensor safe and manufactured to meet OEM specifications. Resists cracking, shrinking and migration caused by thermal expansion. Cures tough and flexible. Temperature resistant up to 500°F (260°C). Resists oil, water, anti-freeze and transmission fluid. For valve covers, oil pans, transmission pans, rear-end housings, timing chain covers, thermostat housing, water pump flanges. Provides exceptional leak control and torque retention.

### Ordering Information:

- Part No.: 49203**  
Size: 3 oz. (85g)  
Packaging: Tube Carded  
Units Per Case: 12
- Part No.: 49276**  
Size: 7.25 oz. (227g)  
Packaging: Automatic Can  
Units Per Case: 12
- Part No.: 49293**  
Size: 11 oz. (312g)  
Packaging: Cartridge  
Units Per Case: 12





## Clear RTV Silicone Adhesive / Sealant

Provides transparent, watertight silicone rubber seal for a wide range of applications. Bonds and seals metal, plastic, glass, fabric, vinyl, wood, and rubber. Use on windshields, sunroofs, tail lights, interior panels, firewalls, and dashboards. Cures at room temperature.

### Ordering Information:

**Part No.: 49204**  
 Size: 3 oz. (85g)  
 Packaging: Tube Carded  
 Units Per Case: 12

**Part No.: 49274**  
 Size: 7.25 oz. (205g)  
 Packaging: Automatic Can  
 Units Per Case: 12

**Part No.: 49294**  
 Size: 11 oz. (312g)  
 Packaging: Cartridge  
 Units Per Case: 12



## Polyurethane Trailer Sealant

### Low Modulus

Single component polyurethane moisture curing sealant that cures to a tough flexible rubber. Becomes tack free in 40-60 minutes and cures through in 2-4 days. When cured, polyurethane provides a strong, durable, weather resistant bond to most substrates. Meets or exceeds the following: TT-S-00230C (Type II) Class A, ASTM C920 Type S, Grade NS, Class 25, Use-NT, A and M. Available in Black, Gray, & White

### Ordering Information:

**Part No.: BOSS 340**  
 Size: 10.3 Fl. oz. (312 g.)  
 Packaging: Cartridge  
 Units Per Case: 12

## Polyurethane Trailer Sealant

### High Modulus

A single component, moisture curing sealant that cures to a tough, flexible rubber. BOSS® 342 has been specially formulated with a short skin formation time of 40 minutes and a high curing speed. BOSS® 342 provides a strong, durable, weather resistant bond to most building substrates and is paintable.

### Ordering Information:

**Part No.: BOSS 342**  
 Size: 10.3 Fl. oz. (312 g.)  
 Packaging: Cartridge  
 Units Per Case: 12



## RTV Silicone Sealant

### Industrial Grade

General Purpose high quality 100% RTV Silicone Sealant. Cures at room temperature to a tough and flexible rubber. For caulking, sealing, waterproofing and bonding. Seals and bonds terminals, connectors, mounting fixtures, mechanical gaskets, glass, metal, masonry, plastic, tile, rubber, wood, and fabric. Part numbers 49280, 49281, and 49285 are manufactured to meet USDA approval.

#### Ordering Information:

- Part No.: 49280 - Clear**  
Size: 11 oz. (312g)  
Packaging: Cartridge  
Units Per Case: 12
- Part No.: 49281 - Grey**  
Size: 11 oz. (312g)  
Packaging: Cartridge  
Units Per Case: 12
- Part No.: 49285 - White**  
Size: 11 oz. (312g)  
Packaging: Cartridge  
Units Per Case: 12
- Part No.: 49286 - White/Mildew Res.**  
Size: 11 oz. (312g)  
Packaging: Cartridge  
Units Per Case: 12
- Part No.: 49297 - Black**  
Size: 11 oz. (312g)  
Packaging: Cartridge  
Units Per Case: 12



## RTV Silicone Sealant

### Marine Grade

Designed for use in marine applications. Silicone Sealant is used for sealing windshields, doors, windows and, wires, around steering cables, depth finder wires, horn assemblies, gauges, marine antenna bases, attaching screws, rail mounts, and other locations where hull has been penetrated. Resists shrinkage. Seals and bonds metal, plastic, wood, glass, fiberglass, vinyl, and fabric. Cures at room temperature.

#### Ordering Information:

- Part No.: 49289**  
Size: 11 oz. (312g)  
Packaging: Cartridge  
Units Per Case: 12





## Hi-Tack Gasket Adhesive / Sealant

Versatile spray adhesive seals gaskets and holds them in place during assembly. Dries quickly. Temperature ranges -65° F to 450° F.

### Ordering Information:

**Part No.:** 49358  
**Size:** 12 oz. (10 oz. Net Wt.)  
**Packaging:** Aerosol Can  
**Units Per Case:** 12

## Auto Seam Sealant

Automotive sealant for exterior and interior joints and seams. Smooths easily, paintable with any type of paint within 60 minutes. Ample time for tooling, solvent not required for smoothing. Will not crack, minimal shrinkage.

### Ordering Information:

**Part No.:** 49388  
**Size:** 11 oz. (312 g.)  
**Packaging:** Cartridge  
**Units Per Case:** 12



## Rear View Mirror Adhesive

Permanently bonds rear view mirror bracket to windshield. Strong and fast acting. No mixing. Two part formula adhesive and primer. Bond strength is 3000 psi.

### Ordering Information:

**Part No.:** 49401  
**Size / Packaging:** 0.3 ml. Vials Carded  
**Units Per Case:** 12

## Quick Weld

Repairs iron, steel, aluminum, brass, copper, plastic and fiberglass. Bonds, fills and seals cracked or chipped castings, weld seams and split stampings. Can be drilled, tapped, threaded, sanded, filed and painted. Will not shrink, rust or corrode. Water and oil proof. Unaffected by most acids and solvents. Combines strength of steel particles with bonding strength of epoxy.

### Ordering Information:

**Part No.:** 49402  
**Size / Packaging:** (2) 1 oz. Tubes  
**Units Per Case:** 12



## 4 Minute Epoxy

Pre-measured syringe assures proper mix for consistent results. Repairs plastic, wood, metal, glass and ceramic. Sets in 4 minutes. Works up to 180° F (82° C).

### Ordering Information:

Part No.: 49409  
Size: 1 oz. (30ml)  
Packaging: Carded  
Units Per Case: 12

## Gas Tank Repair Kit

Seals small holes in gas tanks in just five minutes. Eliminates hazardous welding and the need to remove tank. Sticks to "gasoline wet" metal. Works up to 225° F (107° C). Easy to use. Pre-measured to assure consistent results.

### Ordering Information:

Part No.: 49410  
Size: 1.75 oz. (50g)  
Packaging: Carded  
Units Per Case: 12



## Muffler & Tailpipe Sealant

Repairs holes and leaks in mufflers, tailpipes and around joints. Makes new installations more secure. Run engine at idle speed for 20 minutes to harden quickly or allow to sit overnight.

### Ordering Information:

Part No.: 49411  
Size: 4.5 oz. (126)  
Packaging: Tube Carded  
Units Per Case: 12

## Brush-on Electrical Tape

Forms a tough, flexible coating that seals out moisture and corrosion. Adheres to metal, rubber, vinyl and plastic. Dries at room temperature in 5 minutes.

### Ordering Information:

Part No.: 49412  
Size: 4 oz.  
Packaging: Brush-Top Can  
Units Per Case: 12





## Super Glue

Instantly bonds glass, metals, plastics and rubber. Bonds close fitting parts in seconds. Works on aluminum, copper, brass, steel, vinyl, PVC, polyester, nylon, fiberglass and wood. Holding strength to 5000 psi.

### Ordering Information:

**Part No.: 49403**  
Size / Packaging: 3g Bottle Carded  
Units Per Case: 12

**Part No.: 49431**  
Size / Packaging: 20g Bottle w/Applicator Tip  
Units Per Case: 10

**Part No.: 49435**  
Size / Packaging: 2g Tube Carded  
Units Per Case: 12



## Super Glue Gel

Fast and strong repairs. Works on vertical surfaces - will not run. Extra strength formula bonds rubber, vinyl, most plastics, glass, leather, cork, and more.

### Ordering Information:

**Part No.: 49433**  
Size / Packaging: 2g Tube Carded  
Units Per Case: 12

**Part No.: 49436**  
Size / Packaging: 20g Tube  
Units Per Case: 10



## Super Weatherstrip and Gasket Adhesive

High strength, fast drying, water proof adhesive for holding gaskets in place and for bonding weatherstripping. Parts can be repositioned while drying. Works well on seat trim, headliner trim and carpeting. Bonds rubber, vinyl, metal, fabrics, and glass. Resists oil and most shop and automotive fluids. Holds sanding disks.

### Ordering Information:

**Part No.: 49429**  
Size: 5 oz. (142g)  
Packaging: (Black) Tube Box  
Units Per Case: 12

**Part No.: 49430**  
Size: 5 oz. (142g)  
Packaging: (Yellow) Tube Box  
Units Per Case: 12



## Anaerobic Gasket Maker Red High Strength

Can replace or be used as a dressing for conventional gaskets. Will not shrink due to solvent evaporation. Eliminates the need to retorque compressible mechanical gaskets. Can be used on vacuum pump flanges, fuel pumps, water pumps, gearbox covers, automotive and truck axle covers. Once cured, has an operating temperature range of -65° F to 300° F.

### Ordering Information:

**Part No.:** 49477  
**Size:** 50 ml  
**Packaging:** Red Tube  
**Units Per Case:** 10

## Pipe Sealant with Teflon

Anaerobic sealant chemically cures in the absence of air. Locks and seals threaded fittings. Lubricates and resists corrosion. Prevents leakage and loosening from vibration and moisture in hydraulic, pneumatic, steam and process piping. Allows final adjustment up to 24 hours after application. Instant sealing to 200 psi.

### Ordering Information:

**Part No.:** 49485  
**Size:** 6 ml  
**Packaging:** Tube - Carded  
**Units Per Case:** 12

**Part No.:** 49486  
**Size:** 50 ml  
**Packaging:** Tube  
**Units Per Case:** 6



## Thread Sealant with Teflon

All-purpose thread sealant. Seals threaded connections for air, oil, diesel fuel and hydraulic oil. Remains pliable. Temperature range -65° to 300° F. Performs better than tapes. Withstands pressure up to 1000 psi.

### Ordering Information:

**Part No.:** 49494  
**Size:** 4 oz.  
**Packaging:** Brush Top Bottle  
**Units Per Case:** 12

**Part No.:** 49495  
**Size:** 16 oz.  
**Packaging:** Brush Top Bottle  
**Units Per Case:** 6



## Anaerobic

Anaerobic Boltlocker and Threadlockers are single component liquids. These adhesives are called anaerobics because they crosslink and cure only in the absence of oxygen. The curing process is accelerated by the presence of certain metal ions, such as iron or copper. If applied to copper or brass the curing process is very quick, with stainless material the curing is very slow. Provides a positive seal that resists most fluids. Locks and seals metal threaded assemblies in a wide range of applications. Prevents nuts, bolts, and other fasteners from loosening due to vibration. Works in temperatures from -65°F to 350°F (-54°C to 177°C). Fixture tight in minutes. Protects against thread corrosion.



### Red High Strength Boltlocker

Locks and seals metal threaded assemblies where high strength is required. Fills gaps up to .008 inches. Applied prior to assembly. Protects against thread corrosion.

#### Ordering Information:

**Part No.: 9440**  
Size / Packaging: 1 ml Tube  
Units Per Case: 100

**Part No.: 49450**  
Size / Packaging: 10 ml Bottle  
Units Per Case: 12

**Part No.: 49451**  
Size / Packaging: 6 ml Tube Carded  
Units Per Case: 6

**Part No.: 49452**  
Size / Packaging: 24 ml Bottle Carded  
Units Per Case: 6

**Part No.: 49453**  
Size / Packaging: 50 ml Bottle  
Units Per Case: 10

**Part No.: 49454**  
Size / Packaging: 250 ml Bottle  
Units Per Case: 4



### Blue Medium Strength Boltlocker

Fills gaps up to .006 inches. Applied prior to assembly. Eliminates need for stocking lock nuts and lock washers. Can be removed without special tools.

#### Ordering Information:

**Part No.: 49440**  
Size / Packaging: 10 ml Bottle Carded  
Units Per Case: 12

**Part No.: 49441**  
Size / Packaging: 6 ml Tube Carded  
Units Per Case: 6

**Part No.: 49442**  
Size / Packaging: 24 ml Bottle Carded  
Units Per Case: 6

**Part No.: 49443**  
Size / Packaging: 50 ml Bottle  
Units Per Case: 10

**Part No.: 49444**  
Size / Packaging: 250 ml Bottle  
Units Per Case: 4



### Boltlocker Primer

#### Ordering Information:

**Part No.: 49674**  
Size / Packaging: 6 oz. Aerosol (5.5 oz. net)  
Units Per Case: 6



## Green Medium Strength Boltlocker Wicking Style

Locks and seals metal threads after assembly and adjustments are complete. Fills gaps up to .005 inches. Migrates into pre-assembled threaded parts. Secures adjustments and sets screws.

### Ordering Information:

**Part No.: 49460**  
Size / Packaging: 10 ml Bottle Carded  
Units Per Case: 12

**Part No.: 49461**  
Size / Packaging: 6 ml Tube Carded  
Units Per Case: 6

**Part No.: 49462**  
Size / Packaging: 24 ml Bottle Carded  
Units Per Case: 6

**Part No.: 49463**  
Size / Packaging: 50 ml Bottle  
Units Per Case: 10

**Part No.: 49464**  
Size / Packaging: 250 ml Bottle  
Units Per Case: 4



## Purple Low Strength Boltlocker

Designed for low strength threadlocking applications where easy removal is required. Use on 1/4" (6mm) or smaller diameter screws that require occasional adjustment. Applied before assembly for throttle body assembly screws, choke assembly screws, relay lock screws and body panel mounting fasteners.

### Ordering Information:

**Part No.: 49482**  
Size / Packaging: 24 ml Bottle Carded  
Units Per Case: 6



## Green High Strength SleeveLocker Sleeve Retainer

Eliminates press and slip fits. Replaces splines and keys. Returns worn, out-of-tolerance assemblies to fit. Locks and seals studs, shafts and bearings. Fills gaps up to .006 inches.

### Ordering Information:

**Part No.: 49470**  
Size / Packaging: 10 ml Bottle Carded  
Units Per Case: 12

**Part No.: 49472**  
Size / Packaging: 24 ml Bottle Carded  
Units Per Case: 6

**Part No.: 49473**  
Size / Packaging: 50 ml Bottle  
Units Per Case: 10

**Part No.: 49474**  
Size / Packaging: 250 ml Bottle  
Units Per Case: 4



\* Note: Dynatex® offers other sizes and viscosities on request.



## Anti-Seize & Lubricating Compound

Prevents seizing, fretting, pitting, galling and corrosion on all types of metal parts at temperatures between -200°F and 2000°F (-128°C to 1090°C). Protects against corrosion between dissimilar metals. Resists water, salt solution, most shop and automotive fluids. Prevents carbon fusion and seizure to 2000°F. Reduces coefficient of friction by a minimum of 20%. Meets MIL-907 specifications.

### Ordering Information:

**Part No.:** 49501  
**Size:** 1 oz. (28g)  
**Packaging:** Tube Carded  
**Units Per Case:** 12

**Part No.:** 49550  
**Size:** 4 oz. (114g)  
**Packaging:** Brush Top Bottle  
**Units Per Case:** 24

**Part No.:** 49558  
**Size:** 8 oz. (227g)  
**Packaging:** Brush Top Bottle  
**Units Per Case:** 12

**Part No.:** 49560  
**Size:** 16 oz. (454g)  
**Packaging:** Brush Top Bottle  
**Units Per Case:** 12

**Part No.:** 49576  
**Size:** 16 oz. / 12 oz. (340g) Net Wt.  
**Packaging:** Aerosol Can  
**Units Per Case:** 12

**Part No.:** 49580  
**Size:** 42 lb.  
**Packaging:** 5-Gallon Pail  
**Units Per Case:** 1

**Part No.:** 49582  
**Size:** 8 oz. (227g)  
**Packaging:** Copper\* Brush Top  
**Units Per Case:** 12  
\*Contains Copper

**Part No.:** 49584  
**Size:** 8 oz. (227g)  
**Packaging:** Nickel\* Brush Top  
**Units Per Case:** 12  
\*Contains No Copper



## Brake System Silicone Compound

Contains no petroleum or by-products and will not attack rubber. An excellent release agent and lubricant for rubber and plastic gears. Locks out moisture and has excellent wash-away resistance. Prevents drying and cracking. Recommended by major brake installer chains, fleets, and brake manufacturers. Unaffected by extreme temperatures from -40°F to 500°F.

### Ordering Information:

- Part No.: 1020**  
Size / Packaging: 6 Gr. Pillow Packet  
Units Per Case: 1,400
- Part No.: 49578**  
Size / Packaging: 6 oz. net Automatic Can  
Units Per Case: 12
- Part No.: 49591**  
Size / Packaging: 16 oz. Tub  
Units Per Case: 12
- Part No.: 49593**  
Size / Packaging: 5.3 oz. Tube Boxed  
Units Per Case: 12



## Brake & Caliper Lubricant

Designed to tolerate extremely high temperatures of brake systems. Contains petroleum and is used on metal contact points. High temperature stability to as high as 1000°F for intermittent use. Prevents corrosion and rust, particularly on caliper slide bars.

### Ordering Information:

- Part No.: 49590**  
Size / Packaging: 8 oz. Brush Top Bottle  
Units Per Case: 12



## Synthetic Disc Brake Caliper Grease & Noise Suppressor

Synthetic Disc Brake Caliper Grease is an environmentally friendly, non-melting, pure synthetic lubricant. Formulated to lubricate under the most harmful brake conditions, guaranteeing that critical caliper pins, sleeves, bushings and pistons stay lubricated throughout pad life. Use on: spark plug boots, battery terminals, disc brake calipers, radio antennas, brake hardware.

### Ordering Information:

- Part No.: 49690**  
Size / Packaging: 8 oz. Brush Top Bottle  
Units Per Case: 12

## Disc Brake Quiet

Dampens vibration at caliper/brake pad interface to eliminate brake squeal. Resists diesel fuel, ethylene glycol, water, grease, and brake fluid.

### Ordering Information:

- Part No.: 49661**  
Size / Packaging: 4 oz. (114g) Squeeze Bottle  
Units Per Case: 12
- Part No.: 49662**  
Size / Packaging: 12 oz. Aerosol Can / 9 oz. Net  
Units Per Case: 12



## Heat Transfer Compound

A grease-like silicone material, heavily filled with heat conductive metal oxides. Used as a heat transfer medium in the electrical and electronic industry for facilitating heat dissipation. Withstands high & low temperatures (-65° to 400°F), water resistant, chemically inactive and hydrolytically stable. NLGI No. 2 (Has also been found useful on thermocouple and thermometer wells, mounting semi-conductor devices and thermal joints.)

### Ordering Information:

<b>Part No.:</b>	<b>49640</b>
<b>Size:</b>	1 oz.
<b>Packaging:</b>	Tube
<b>Units Per Case:</b>	12
<b>Part No.:</b>	<b>49643</b>
<b>Size:</b>	5 oz. (142g)
<b>Packaging:</b>	Tube Boxed
<b>Units Per Case:</b>	12
<b>Part No.:</b>	<b>49644</b>
<b>Size:</b>	32 oz.
<b>Packaging:</b>	Tub
<b>Units Per Case:</b>	12



## Red Grease

Multi-purpose lubricant provides extra protection under extreme pressure and temperatures from 0°F to 400° F. Excellent water resistance makes it ideal for machinery operating in damp environments. Also for use on bearings, automotive hinges, hitches, fifth wheels, cables, pulleys, and chains.

### Ordering Information:

<b>Part No.:</b>	<b>49611</b>
<b>Size:</b>	16 oz. / 11.5 oz. Net wt.
<b>Packaging:</b>	Aerosol Can
<b>Units Per Case:</b>	12

## White Lithium Grease

General purpose lubricant. Protects against rust and corrosion. Minimizes friction. Reduces wear to equipment. Increases service life. Can be used on door, hood, and trunk latches. Hinges and compartment springs, seat regulators and tracks, wiper mechanisms, brake parts and distributor cams. Manufactured to meet USDA specifications.

### Ordering Information:

<b>Part No.:</b>	<b>49594</b>
<b>Size:</b>	1.5 oz. (8.5g) Net wt.
<b>Packaging:</b>	Tube Carded
<b>Units Per Case:</b>	12
<b>Part No.:</b>	<b>49595</b>
<b>Size:</b>	16 oz.
<b>Packaging:</b>	Tub
<b>Units Per Case:</b>	12
<b>Part No.:</b>	<b>49596</b>
<b>Size:</b>	16 oz. / 12 oz. Net wt.
<b>Packaging:</b>	Aerosol Can
<b>Units Per Case:</b>	12
<b>Part No.:</b>	<b>49597</b>
<b>Size:</b>	35 lb.
<b>Packaging:</b>	5-Gallon Pail
<b>Units Per Case:</b>	1





## Dielectric Grease

Prevents boot tears, corrosion, arcing and the fusing of spark wires to spark plugs. Maintains its consistency in extreme temperatures from -40°F to 400°F. Resists moisture, acids and alkalines. Moisture proof seal for automotive, marine and other ignition and electrical systems. Complies with FDA regulation 21 CFR 178.3570.

### Ordering Information:

**Part No.: 1046**  
Size: 2 Gr.  
Packaging: Pillow Packet  
Units Per Case: 3,000

**Part No.: 49634**  
Size: 1/3 oz. (8.5g)  
Packaging: Tube Carded  
Units Per Case: 12

**Part No.: 49635**  
Size: 5 oz. (142g)  
Packaging: Tube Boxed  
Units Per Case: 12

## Motor Assembly Grease

Lubricant widely used for engine rebuilding. Protects engine from rust and corrosion during storage. Once engine is started, protects moving parts until engine-lubricating oil reaches them.

### Ordering Information:

**Part No.: 49598**  
Size: 6 oz. (170g)  
Packaging: Squeeze Tube  
Units Per Case: 12

## Wheel Bearing Grease

A premium state-of-the-art lithium complex grease, this multipurpose lubricant has a high dropping point in excess of 500°F, which ensures retention where high temperatures are encountered. An excellent bearing lubricant for car & truck trailers, sports vehicles and plant equipment. Particularly recommended for disc brake equipped vehicles. Excellent water resistor and rust inhibitor. NLGI No. 2

### Ordering Information:

**Part No.: 54016**  
Size: 1 lb. (16 oz.)  
Packaging: Can  
Units Per Case: 12

## Transmission Assembly Lube

Specially formulated for use as an assembly lubricant for automatic and manual transmissions. Remains stable and smooth at working temperatures, soluble in transmission fluids and will not clog transmission filters. Apply to bearings, seals, O-rings, gaskets, bushings, sealing rings, thrust washers and hydraulic seals. Blue color eliminates misdiagnosing leaks.

### Ordering Information:

**Part No.: 55016**  
Size: 1 lb. (16 oz.)  
Packaging: Plastic Tub  
Units Per Case: 12





## Brake & Parts Cleaner Non-Chlorinated

Helps remove brake fluid, grease, and resins. Evaporates quickly and completely. Degreases drum and disc brake parts. Contains no chlorinated solvents.

### Ordering Information:

**Part No.:** 49665  
**Size:** 20 oz. / 14 oz. Net Wt.  
**Packaging:** Aerosol Can  
**Units Per Case:** 12

**Part No.:** 49669  
**Size:** 1 Gallon 3.8L  
**Packaging:** 1 Gallon Pail  
**Units Per Case:** 4

**Part No.:** 49670  
**Size:** 5 Gallon 19L  
**Packaging:** 5 Gallon Pail  
**Units Per Case:** 1

**Part No.:** 49671  
**Size:** 55 Gallon  
**Packaging:** 55 Gallon Drum  
**Units Per Case:** 1



## Gasket Remover

Quickly removes baked-on gaskets, silicone, weatherstrip adhesive, carbon deposits, dried oil, adhesives, grease and paint. Removes gaskets in 10-12 minutes. Prepares metal parts for new gasket installation.

### Ordering Information:

**Part No.:** 49673  
**Size:** 16 oz. / 13 oz. Net Wt.  
**Packaging:** Aerosol Can  
**Units Per Case:** 12



## Battery Cleaner & Acid Detector

Detects corrosion buildup on terminals, cables, hold-downs, and hoses. Instantly neutralizes and dissolves harmful acid. Turns pink on contact with battery acid.

### Ordering Information:

**Part No.:** 49675  
**Size:** 16 oz. / 15 oz. Net Wt.  
**Packaging:** Aerosol Can  
**Units Per Case:** 12



## Battery Protector / Corrosion Inhibitor

Prolongs battery life by protecting battery terminals and connectors against moisture and corrosion. It also resists heat aging.

### Ordering Information:

**Part No.:** 49678  
**Size:** 16 oz. / 11 oz. Net Wt.  
**Packaging:** Aerosol Can  
**Units Per Case:** 12



## Carb & Choke Cleaner

V.O.C. Compliant helps remove varnish, gum, sludge, and other deposits in minutes, improving performance. VOC compliant. Contains no CFC's.

### Ordering Information:

Part No.: 52105  
Size: 16 oz. / 12 oz. Net Wt.  
Packaging: Aerosol Can  
Units Per Case: 12




## Silicone Lubricant

A dry film lubricant, which waterproofs, protects, reduces corrosion, lubricates and extends life of rubber and plastic parts. Suitable for metal, plastic, rubber, vinyl, leather, and wood. Active ingredients comply with FDA and USDA regulations. Non-flammable.

### Ordering Information:

Part No.: 52115  
Size: 16 oz. / 10.25 oz. Net Wt.  
Packaging: Aerosol Can  
Units Per Case: 12

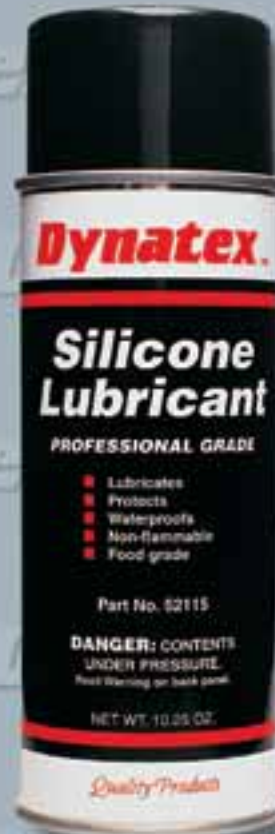

## Penetrating Oil

Prevents rust and corrosion by depositing an ultra thin film that coats and penetrates the surface pores of metal. Penetrates quickly to free rusted bolts, nuts, and sliding parts. Displaces moisture to dry out damp electrical parts.

### Ordering Information:

Part No.: 52125  
Size: 16 oz. / 12 oz. Net Wt.  
Packaging: Aerosol Can  
Units Per Case: 12

## Electrical Parts Cleaner



Quickly dissolves and flushes away grease, oil, dirt, and other contaminants while leaving no residue. Dismantling is eliminated on most equipment. Use on air conditioning equipment, electric motors, alternators, starting motors, cables, controls, regulators, relays, signals, solenoids, electrical contact points, connections, air compressors, battery chargers and more. NOT SAFE FOR USE ON RUBBER OR PLASTIC PARTS

### Ordering Information:

**Part No.:** 52145  
**Size:** 16 oz. / 16 oz. Net Wt.  
**Packaging:** Aerosol Can  
**Units Per Case:** 12




## Contact Cleaner

Removes grease, dirt, oil, and other surface contaminants from electrical/electronic devices. Fast drying, leaves no residue, and cleans easily. Safe on most surfaces. Extremely-flammable.

### Ordering Information:

**Part No.:** 52146  
**Size:** 16 oz. / 12 oz. Net Wt.  
**Packaging:** Aerosol Can  
**Units Per Case:** 12

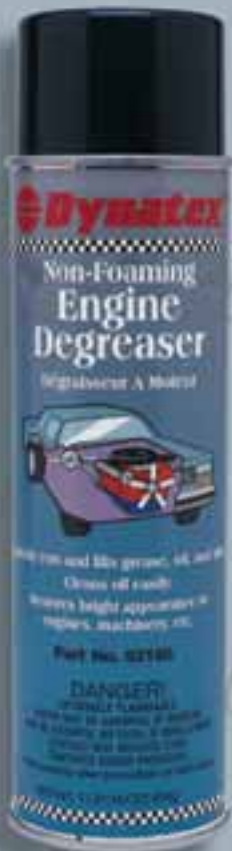

## Engine Degreaser

Quickly removes grease, oil, dirt, and other contaminants. Works on steel, aluminum, copper and other metals. Safe for use on rubber and plastic. Can also be used on driveways and garage floors.

### Ordering Information:

**Part No.:** 52165  
**Size:** 20 oz. / 16 oz. Net Wt.  
**Packaging:** Aerosol Can  
**Units Per Case:** 12



## Rubberized Undercoating

Seals, protects and insulates. To prevent rust and deaden sound. Undercoat leaves a firm, black, resilient, rubbery texture, which protects against rust and corrosion. Paintable. Quiets road noise. Also for wood fences, post preserver and tree wound dressing. Adheres to any surface.

### Ordering Information:

**Part No.:** 52175  
**Size:** 20 oz. / 16 oz. Net Wt.  
**Packaging:** Aerosol Can  
**Units Per Case:** 12



## Glass Cleaner

Non-streaking formula cuts through stubborn dirt and film without smudging. Removes tar, road film, insects, salt, grease, and paint overspray from glass. Also can be used on mirrors, chrome, porcelain, stainless steel, and other hard surfaces. Contains no CFC's. Ammonia Free.

### Ordering Information:

**Part No.:** 52185  
**Size:** 20 oz. / 19 oz. Net Wt.  
**Packaging:** Aerosol Can  
**Units Per Case:** 12

## Belt Dressing

Stops squeal and protects against belt slippage due to heat, cold, dampness, dust and glazing. Extends belt life by conditioning against drying and cracking. Helps prevent premature wear. Provides better grip and traction. Can be used on fan belts, power steering belts, water pumps and power tools.

### Ordering Information:

**Part No.:** 52188  
**Size:** 16 oz. / 12 oz. Net Wt.  
**Packaging:** Aerosol Can  
**Units Per Case:** 12

## Hand Cleaner

### Natural Citrus Lotion with Pumice

Quickly removes grease, oil, tar, ink, paint, carbon, gasket and tile cement and more. Cleans your hands with the natural power of citrus. Contains no solvents or petroleum and is biodegradable.

### Ordering Information:

**Part No.:** 53106  
**Size:** 15 fl. oz.  
**Packaging:** Squeeze Bottle  
**Units Per Case:** 12


**Part No.:** 53128  
**Size:** 1 Gallon  
**Packaging:** Jug with Pump  
**Units Per Case:** 4

## Brake Fluid - DOT 3

Recommended for all types of automotive brake systems, drum and disc brakes. Protects metal and rubber parts against wear and corrosion. Exceeds 450°F boiling point for DOT 3 brake fluid. Exceeds SAE spec. J1703, Federal spec. W-B-680 and conforms to federal motor vehicle safety standard 116 for DOT 3 brake fluid. Can be mixed with all brake fluids approved by car, tractor, truck and bus manufacturers (excluding Citreon).

### Ordering Information:

**Part No.:** 56012  
**Size:** 12 fl. oz.  
**Packaging:** Plastic Bottle  
**Units Per Case:** 24

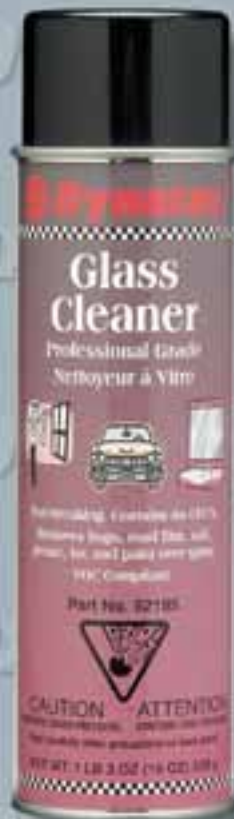

Permatex #	Dynatex® #	Versachem #	ProSeal #	Description
12020*	49410	90180	62020	Gas Tank Repair Kit / 1.75 oz.
14600	49402	44209	64600	Quick Weld Compound / 2 - 1oz. Tubes
19961*	9440			Red High Strength / 1ml 100 per case
20539	49350	52000		Discontinued
22058*	49635	15339		Dielectric Grease 5oz. Tube
82180*	47200	99839*		DynaBlack 3.8 oz. Tube
24110	49690	26080		Synthetic Brake & Caliper Lube 8oz.
24163*	49674			Boltlocker Primer 6oz. - 5.5oz. Net
24200	49441	24569	24206	Blue Medium Strength 6ml Carded
24240*	49442	24536*	24250	Blue Medium Strength 24 ml Carded
24283*	49444			Blue Medium Strength 250 ml Bottle
25116	53106			Hand Cleaner w/Pumice - 15fl. Oz.
25218	53128			Hand Cleaner w/Pumice - 1 Gallon w/pump
25223*	47270			Super Stuff Black 9oz. Automatic Can L/V
25224*	47270			Super Stuff Black 9oz. Automatic Can L/V
27100	49451	27569	27106	Red High Strength 10ml Carded
27140*	49452	27536*	27150	Red High Strength 24ml Carded
27183*	49454			Red High Strength 250ml
27200	49450	27569	27106	Red High Strength 10ml Bottle
29000	49461		29006	Green Medium Strength 6ml Carded
29040*	49462	27950		Green Medium Strength 24 ml Carded
29208*	47290			Super Stuff 10.1 Fl. Oz. Cartridge
49450	49431			Super Glue - 20g. Bottle
51813	49477		08030	Red Anaerobic Gasket Maker - 50ml Tube
56521	49486		08000	Pipe Sealant w/Teflon 50ml Tube
59214	49485			Pipe Sealant w/Teflon 6 ml Tube
59235	49486		08000	Pipe Sealant w/Teflon 50ml Tube
60931*	49472			Green Sleeve Retainer - 24ml Bottle Carded
64000*	49472			Green Sleeve Retainer - 24ml Bottle Carded
64040*	49472			Green Sleeve Retainer - 24ml Bottle Carded
68035*	49469			Green Retaining Compound 250ml Bottle
82191	49433	29345	SGG2	Super Glue Gel 2g
77124	49584			Nickel Anti-Seize 8 oz. Brush Top Bottle
80001	49301	11500		Discontinued - Can Use 49430
80002*	49301	13000		Discontinued - Can Use 49430
80007*	49301	11509		Discontinued - Can Use 49430
80008*	49301	13009		Discontinued - Can Use 49430
80009	49302	21500		Discontinued - Can Use 49202
80010	49311			Discontinued - Can Use 49202
80015	49302	21509		Discontinued - Can Use 49202
80016*	49302	23009		Discontinued - Can Use 49202
80017*	49351	31600	80035	Discontinued
80023	49243			Blue RTV Silicone 12oz. Tube Boxed
80043*	52165			Engine Degreaser 20oz. - 16oz. Net
80050	49204	73009	80066	Clear RTV 3oz. Tube Carded
80052	52125			Penetrating Oil 16oz. - 12oz. Net
80057	49351	31600	80035	Discontinued
80058*	49351	34000	80035	Discontinued
80064*	49358	22108*		Hi-Tack Gasket Spray 12oz. - 10oz. Net
80065*	49358	22108*		Hi-Tack Gasket Spray 12oz. - 10oz. Net
80068*	52125			Penetrating Oil - 16oz. - 12oz. Net
80070	52115			Silicone Spray - 16oz. - 10.25oz. Net
80072	52175	28208*	63040	Rubberized Undercoating 20oz. - 16oz. Net



Permatex #	Dynatex® #	Versachem #	ProSeal #	Description
80073	52188			Belt Dressing 16oz. - 12oz. Net
80076	49664			Discontinued - Use 52145
80077	49662	27108**	80995	Disc Brake Quiet - 12oz. - 9oz. Net
80078	49558	13010	33008	Anti-Seize - 8oz. Brush Top Bottle
80079	52105			Carb & Choke Cleaner 12oz. Net
80335*	49411	00160*	62025	Muffler & Tailpipe Sealant 4.5oz Tube Carded
80345	49594			White Lithium Grease - 1.5oz. Tube Carded
80369*	49675			Battery Terminal Cleaner - 16oz. 15oz Net
80370*	49678			Battery Protector - 16oz. - 11oz. Net
80628	49293	61310	80007	Blue RTV L/V 11oz. Cartridge
80632	49494	28369*		Thread Sealant w/Teflon 4oz. Brush Top
80633	49495	28369*		Thread Sealant w/Teflon 16oz. Brush Top
80636	49234	73000	80066	Discontinued Use 49204
80638*	49430	80050	88881	Yellow Super Weatherstrip 5oz. Tube Boxed
80646*	49673	41008*	80804	Gasket Remover 16oz. - 13oz. Net
80855	49294	12007	80067	Clear RTV 11oz. Cartridge
80884*	49410	90180	62020	Gas Tank Repair Kit - 1.75oz. Carded
81150	49634	15309*		Dielectric Grease - .33oz. Tube Carded
81157	49230			Discontinued - Use 49200
81158	49200	27309	80046	Black RTV L/V 3oz. Tube Carded
81160	49202	65309	80726	Red - Hi-Temp RTV L/V 3oz. Tube Carded
81173	49290	12270	80047	Black RTV L/V 11 oz. Cartridge
81343	49501	13109	33001	Anti-Seize 1oz. Tube Carded
81409	49292	65010	80728	Red - Hi-Temp - RTV L/V 11 oz. Cartridge
81422	49202	65309	80726	Red - Hi-Temp - RTV L/V 3oz. Tube Carded
81464*	49576			Anti-Seize - 16 oz. - 12oz. Net
81686	49292	65010	80728	Red - Hi-Temp - RTV L/V 11 oz. Cartridge
81724*	47203	77739*	80003	DynaBlue RTV L/V 3.8 oz. Tube Carded
81731	49430	80050	88881	Yellow Super Weatherstrip 5 oz. Tube Boxed
81787	49409	46409	50513	4-Minute Epoxy Syringe - 1 Fl. oz.
81850	49429			Black Super Weatherstrip Adh. 5oz.
81854*	49276	61388*	80009	Blue RTV L/V 7.25oz. Can
81855*	49272	65088*	80729	Red RTV Hi-Temp L/V 7.25oz. Can
81856*	49274			Clear RTV 7.25 oz Can
81860*	49276	61388*	80009	Blue RTV L/V 7.25oz. Can
81878*	47101	88839*	78002	DynaCopper 3.8 oz. Tube Carded
81912	49285	12280		Silicone Sealant - White - 11oz. Cartridge
81913*	49274			Clear RTV 7.25oz. Can
81914*	49271	27388*	80049	Black RTV L/V 7.25oz. Can
81981*	49596			White Lithium Grease 16oz. - 12oz. Net
82017	49661	27400	80994	Disc Brake Quiet - 4 oz. Bottle
82180*	47200	99839*		DynaBlack RTV L/V 3.8 oz. Tube Carded
82190*	49435	29045	50102	Super Glue - 2g Carded
82191	49433	29345	SGG2	Super Glue Gel - 2g Carded
82194*	47181	99939		DynaGrey RTV L/V 3.8 oz. Tube Carded
82220*	49665	23178*	80990	Brake Cleaner N/C - 20oz. - 14oz. Net
	49669			Brake Clean N/C - One Gallon
	49670			Brake Clean N/C - Five Gallon
	49671			Brake Clean N/C - Fifty-Five Gallon
	1020	26199*		Brake System Compound - 6g Pillow Pack
	49401	11109*		Rearview Mirror Adhesive - .3ml Pack w/Primer
	1046	15319*		Dielectric Grease - 2g Pillow Pack

\*Size Difference

## **Dynatex®**

350 Ring Road  
Elizabethtown, KY 42701  
270-769-5557 PH  
270-769-6418 FAX

### **Regional Office**

988 Chetford Drive  
Lexington, KY 40509  
859-263-2326 PH  
859-263-0882 FAX

### **Asian Office**

#18 Kitpanit Bldg. 5th Floor  
#502 Patpong Road  
Suriyawong, Bangrak  
Bangkok, 10500 Thailand  
662-634-3060 PH  
662-634-3066 FAX

Visit us on the world wide web at  
[dynatexinc.com](http://dynatexinc.com)  
E-mail: [sales@dynatexinc.com](mailto:sales@dynatexinc.com)



**Distributed By:**